

Datasheet

# 2.5" SATA SSD

## 3TG6-P series

- 2.5" SATA III solution for industrial field
- High IOPS
- iSMART disk health monitoring
- AES-256 encryption
- End to end data path protection
- iData Guard for abnormal power failure
- iCell technology for data protection (optional)
- iPower Guard for protecting unstable start up and shut down



### Introduction

Innodisk 2.5" SATA SSD 3TG6-P is SATA III 6Gb/s solid state disk, which delivers excellent performance, especially in random data transfer rate, and which offers reliability making it the ideal solution for a variety of applications, including embedded system, industrial computing, and enterprise field. 3TG6-P 2.5" SSD not only performs unmatched performance, but also designed with Innodisk owned technical knowhow to ensure the data integrity and highest levels of reliability.

# 2.5" SATA SSD

## 3TG6-P series


Contact us for more information  
about the 2.5" SATA SSD 3TG6-P

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the industrial/embedded, aerospace and defense, and cloud computing industries.

### Drawing

\* DGS25-XXXM71EXXQF (128GB-4TB)

\* DGS25-08TM71EXXQF (8TB)

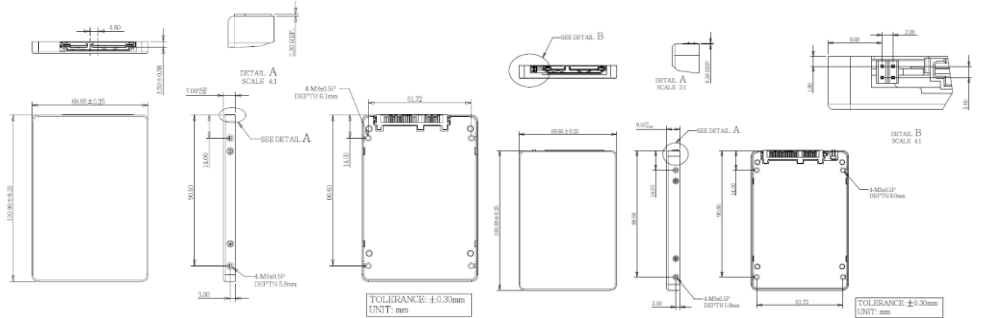

## Specifications

Interface	SATA III
Flash Type	3D TLC
Capacity	128GB~8TB
Max. Channels	4
Sequential R/W (MB/sec, max.)*	560 / 510 MB/s
4KB Random (QD32) R/W (IOPS)*	82000 / 68000
Max. Power Consumption	12 W
Thermal Sensor	✓
External DRAM Buffer	✓
AES encryption	✓
ATA Security	✓
S.M.A.R.T.	✓
Dimension (WxLxH)	69.8 X 100.0 X 6.8 mm <sup>3</sup> (128GB ~ 4TB) 69.8 X 100.0 X 9.5 mm <sup>3</sup> (8TB)
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

\* Sequential performance based on CrystalDiskMark 5.1.2 with file size 1000MB of Queue Depth 32

#### Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd.,  
Xizhi Dist., New Taipei City,  
Taiwan (R.O.C.)  
Tel: +886-2-77033000  
Email: sales@innodisk.com

#### Branch Offices:

USA  
[usasales@innodisk.com](mailto:usasales@innodisk.com)  
+1-510-770-9421  
Europe  
[eusales@innodisk.com](mailto:eusales@innodisk.com)  
+31-40-3045-400  
Japan  
[jpsales@innodisk.com](mailto:jpsales@innodisk.com)  
+81-3-6667-0161  
China  
[sales\\_cn@innodisk.com](mailto:sales_cn@innodisk.com)  
+86-755-21673689  
[www.innodisk.com](http://www.innodisk.com)

© 2017 Innodisk Corporation.  
All right reserved. Specifications  
are subject to change without  
prior notice.

20180703

## Ordering Information (Please refer to TPS for detail)

Operation Temp.	128GB	256GB	512GB	1TB	2TB	4TB	8TB
Standard Grade (0°C ~ +70°C)	DGS25-A28M71EC3QF DGS25-A28M71EC1QFP	DGS25-B56M71EC3QF DGS25-B56M71EC1QFP	DGS25-C12M71EC3QF DGS25-C12M71EC1QFP	DGS25-01TM71EC1QF (P)	DGS25-02TM71ECAQF(P)	DGS25-04TM71ECBQF	DGS25-08TM71ECBQF
Industrial Grade (-40°C ~ +85°C)	DGS25-A28M71EW3QF DGS25-A28M71EW1QFP	DGS25-B56M71EW3QF DGS25-B56M71EW1QFP	DGS25-C12M71EW3QF DGS25-C12M71EW1QFP	DGS25-01TM71EW1QF (P)	DGS25-02TM71EWAQF(P)	DGS25-04TM71EWBQF	DGS25-08TM71EWBQF

**innodisk**

[www.innodisk.com](http://www.innodisk.com)