


# CA-108 Series

## 8-port RS-232 PC/104 modules

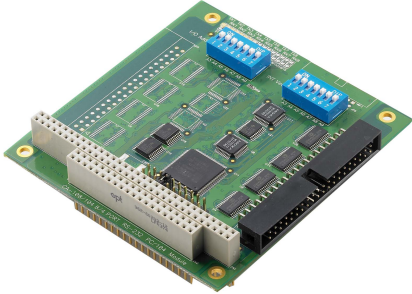

### Features and Benefits

- 921.6 kbps maximum baudrate for fast data transmission
- On-chip hardware and software flow control
- IRQ and I/O settings are jumper and DIP switch selectable
- Onboard Tx and Rx LED indicators for each port
- Supports Windows CE 5.0/6.0 and Windows XP Embedded operating systems
- Wide-temperature model available for -40 to 85°C environments

### Certifications



## Introduction

The CA-108 PC/104 modules are reliable, high-performance, multiport serial communication solutions that have 8 RS-232 ports, and can be used with PC/104 CPU boards that accept the PC/104 expansion interface. Optional DB9 and DB25 connection cables are available for connecting to serial devices, and versatile driver support makes the modules suitable for a wide range of applications.

## Specifications

### Serial Interface

|                           |                                                         |
|---------------------------|---------------------------------------------------------|
| Comm. Controller          | 16C550C or compatible x 4                               |
| Bus                       | PC/104 bus                                              |
| Connector                 | 40-pin box header                                       |
| DIP Switches              | I/O base address, Interrupt vector                      |
| IRQ                       | 3, 4, 5, 6, 7, 9, 10, 11, 12, 15 (shared for all ports) |
| FIFO                      | 64 bytes                                                |
| Max. No. of Boards per PC | 8                                                       |
| No. of Ports              | 8                                                       |
| Serial Standards          | RS-232                                                  |
| Baudrate                  | 50 bps to 921.6 kbps                                    |
| Data Bits                 | 5, 6, 7, 8                                              |
| Stop Bits                 | 1, 1.5, 2                                               |
| Parity                    | None, Even, Odd, Space, Mark                            |
| Flow Control              | None, RTS/CTS, XON/XOFF                                 |

### Serial Signals

|        |                                        |
|--------|----------------------------------------|
| RS-232 | TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND |
|--------|----------------------------------------|

## Serial Software Features

|                 |                                                                                                                                                                      |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Windows Drivers | DOS, Windows 95/98/ME/NT/2000, Windows XP/2003/Vista/2008/7/8/8.1/10 (x86/x64), Windows 2008 R2/2012/2012 R2 (x64), Windows Embedded CE 5.0/6.0, Windows XP Embedded |
| Linux Drivers   | Linux kernel 2.4.x, Linux kernel 2.6.x                                                                                                                               |
| UNIX Drivers    | FreeBSD 4.x, QNX 4                                                                                                                                                   |

## Power Parameters

|               |                |
|---------------|----------------|
| Input Current | 210 mA @ 5 VDC |
| Input Voltage | 5 VDC          |

## Physical Characteristics

|            |                             |
|------------|-----------------------------|
| Dimensions | 90 x 96 mm (3.54 x 3.78 in) |
|------------|-----------------------------|

## LED Interface

|                |                                    |
|----------------|------------------------------------|
| LED Indicators | Built-in Tx, Rx LEDs for each port |
|----------------|------------------------------------|

## Environmental Limits

|                                        |                                                                         |
|----------------------------------------|-------------------------------------------------------------------------|
| Operating Temperature                  | CA-108: 0 to 55°C (32 to 131°F)<br>CA-108-T: -40 to 85°C (-40 to 185°F) |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)                                              |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)                                               |

## Standards and Certifications

|                       |                                                                                                                                                                                                                                                                                         |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EMC                   | EN 55032/24                                                                                                                                                                                                                                                                             |
| EMI                   | CISPR 32, FCC Part 15B Class A                                                                                                                                                                                                                                                          |
| EMS                   | IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m<br>IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV<br>IEC 61000-4-5 Surge: Power: 0.5 kV<br>IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m<br>IEC 61000-4-8 PFMF<br>IEC 61000-4-11 DIPs |
| Environmental Testing | IEC 60068-2-1<br>IEC 60068-2-2<br>IEC 60068-2-3<br>IEC 60068-2-14                                                                                                                                                                                                                       |
| Safety                | EN 60950-1, UL 60950-1                                                                                                                                                                                                                                                                  |
| Vibration             | IEC 60068-2-6                                                                                                                                                                                                                                                                           |

## Declaration

|               |                   |
|---------------|-------------------|
| Green Product | RoHS, CRoHS, WEEE |
|---------------|-------------------|

## MTBF

|           |                          |
|-----------|--------------------------|
| Time      | 897,459 hrs              |
| Standards | Telcordia (Bellcore), GB |

## Warranty

|                 |                                                                      |
|-----------------|----------------------------------------------------------------------|
| Warranty Period | 5 years                                                              |
| Details         | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a> |

## Package Contents

|               |                                                                                   |
|---------------|-----------------------------------------------------------------------------------|
| Device        | 1 x CA-108 Series PC/104 module                                                   |
| Documentation | 1 x document and software CD<br>1 x quick installation guide<br>1 x warranty card |

## Ordering Information

| Model Name | Serial Bus | Serial Standards | No. of Serial Ports | Operating Temp. |
|------------|------------|------------------|---------------------|-----------------|
| CA-108     | PC/104     | RS-232           | 8                   | 0 to 55°C       |
| CA-108-T   | PC/104     | RS-232           | 8                   | -40 to 85°C     |

© Moxa Inc. All rights reserved. Updated Mar 11, 2020.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.